

# Document made available under the Patent Cooperation Treaty (PCT)

International application number: PCT/EP05/001582

International filing date: 17 February 2005 (17.02.2005)

Document type: Certified copy of priority document

Document details: Country/Office: EP  
Number: 04006810.8  
Filing date: 22 March 2004 (22.03.2004)

Date of receipt at the International Bureau: 01 April 2005 (01.04.2005)

Remark: Priority document submitted or transmitted to the International Bureau in compliance with Rule 17.1(a) or (b)



World Intellectual Property Organization (WIPO) - Geneva, Switzerland  
Organisation Mondiale de la Propriété Intellectuelle (OMPI) - Genève, Suisse



**Europäisches  
Patentamt**

**European  
Patent Office**

**Office européen  
des brevets**

**Bescheinigung**

**Certificate**

**Attestation**

Die angehefteten Unterlagen stimmen mit der ursprünglich eingereichten Fassung der auf dem nächsten Blatt bezeichneten europäischen Patentanmeldung überein.

The attached documents are exact copies of the European patent application described on the following page, as originally filed.

Les documents fixés à cette attestation sont conformes à la version initialement déposée de la demande de brevet européen spécifiée à la page suivante.

**Patentanmeldung Nr.    Patent application No.    Demande de brevet n°**

04006810.8

Der Präsident des Europäischen Patentamts;  
Im Auftrag

For the President of the European Patent Office

Le Président de l'Office européen des brevets  
p.o.

**R C van Dijk**





Anmeldung Nr:  
Application no.: 04006810.8  
Demande no:

Anmeldetag:  
Date of filing: 22.03.04  
Date de dépôt:

Anmelder/Applicant(s)/Demandeur(s):

Sony Ericsson Mobile Communications AB

221 88 Lund  
SUEDE

Bezeichnung der Erfindung/Title of the invention/Titre de l'invention:  
(Falls die Bezeichnung der Erfindung nicht angegeben ist, siehe Beschreibung.  
If no title is shown please refer to the description.  
Si aucun titre n'est indiqué se referer à la description.)

Raising antenna efficiency for a portable communication device

In Anspruch genommene Priorität(en) / Priority(ies) claimed /Priorité(s)  
revendiquée(s)

Staat/Tag/Aktenzeichen/State/Date/File no./Pays/Date/Numéro de dépôt:

Internationale Patentklassifikation/International Patent Classification/  
Classification internationale des brevets:

H01Q/

Am Anmeldetag benannte Vertragstaaten/Contracting states designated at date of  
filing/Etats contractants désignées lors du dépôt:

AT BE BG CH CY CZ DE DK EE ES FI FR GB GR HU IE IT LU MC NL  
PL PT RO SE SI SK TR LI



## RAISING ANTENNA EFFICIENCY FOR A PORTABLE COMMUNICATION DEVICE

### TECHNICAL FIELD OF THE INVENTION

- 5 The present invention relates to the field of antennas and more particularly to a portable communication device including an in-built antenna.

### DESCRIPTION OF RELATED ART

- 10 There is a trend within the field of portable communicating devices, and especially within the field of cellular phones to have the antenna in-built in the phone itself. The phones are also becoming smaller and smaller, with a need to use the space of the phone as effectively as possible. At the same time the phones have more and more functions and features and therefore also more components provided in them. Due to this fact it is hard  
15 to get antennas with a good performance. One important factor in getting good performance is the size of the ground plane, which needs to be as large as possible.

- One frequently used type of antenna is the PIFA (Planar Inverted-F Antenna) antenna, where an essentially L-shaped antenna element is placed with one leg of the L at right  
20 angles to the ground plane and the other leg being essentially parallel with the ground plane. The space between the antenna element and the ground plane inside the L defines an antenna volume, which is interesting to use for placing of components and other units. It is in this regard interesting to use it in relation to acoustic elements, because these might not be that sensitive to the radiation from the antenna. A speaker can then for  
25 instance be provided in relation to a hole in the board in or close to the antenna volume.

- It is furthermore interesting to provide speakers with good sound properties in the phones of today in order to use the phone as a music machine. In doing this it is often interesting to provide stereo sound, and thus use two speakers. In order to get good stereo sound the  
30 speakers might furthermore need to be large, which makes the corresponding holes in the board even larger.

- When big holes are made in the board under the antenna element, there will naturally be holes also in the ground plane, which is thus not solid any more. This is a serious  
35 drawback for the efficiency of the antenna, which then has a worse performance, than an antenna with a solid ground plane.

There is thus a need for providing a solution to the worsened performance because of holes provided in the ground plane close to the antenna volume of an antenna.

EP-1317116 describes a cellular phone having a board with a ground plane above which is placed a PIFA antenna for defining an antenna volume. The antenna volume is used for the placing of a loudspeaker. The loudspeaker is in the preferred embodiment of the document  
 5 placed inside the antenna volume. Radiation is here partly absorbed by the speaker, which absorption is here limited through varying the escape path impedance for the created radiation. This varying is in the preferred embodiment provided through inserting inductances between the windings of the speaker and the electrical feeding connections of the speaker, which stops the radiofrequencies received by the speaker from reaching the  
 10 ground plane. In another embodiment the speaker is placed on one side of the board, with one part extending into the antenna volume through a hole of the board, while the antenna is provided on the opposite side of the board. The hole is here the element that varies the escape path. In this embodiment there is thus a hole in the ground plane, which, although it hinders absorption of radiation by the loudspeaker, would probably still  
 15 provide worsened performance of the antenna because of the hole, especially if this hole was big.

#### SUMMARY OF THE INVENTION

20 The present invention is directed towards solving the problem of enhancing the performance of the in-built antenna in a portable communication device when the ground plane for the antenna has holes close to an antenna element.

One object of the present invention is thus to provide a portable communication device  
 25 that enhances the performance of an included in-built antenna when the ground plane for the antenna has holes close to an antenna element.

According to a first aspect of the present invention, this object is achieved by a portable communication device comprising:

- 30 a board for receiving electrical circuits and comprising a ground plane and having at least one throughhole,
- an antenna element provided on one side of the board, and
- an acoustic element placed on the board aligned with the throughhole,
- wherein an electrically conducting material related to the exterior of said
- 35 acoustic element is connected to the ground plane of said board for enhancing the efficiency of the antenna.

A second aspect of the present invention is directed towards a portable communication device including the features of the first aspect, wherein the antenna element is positioned

with at least one part at a distance above the board, for defining an antenna volume between the board and the antenna element, and said at least one hole is provided under the antenna element.

- 5 A third aspect of the present invention is directed towards a portable communication device including the features of the second aspect, wherein the acoustic element is provided on another opposite side of the board.

- A fourth aspect of the present invention is directed towards a portable communication  
10 device including the features of the third aspect, wherein an acoustic box associated with the acoustic element is provided in the antenna volume.

- A fifth aspect of the present invention is directed towards a portable communication device including the features of the first aspect, wherein the material is a cover of the acoustic  
15 element made of an electrically conducting material.

- A sixth aspect of the present invention is directed towards a portable communication device including the features of the fifth aspect, wherein the cover is provided with sound apertures.  
20

- A seventh aspect of the present invention is directed towards a portable communication device including the features of the first aspect, wherein the material is a mesh made of an electrically conducting material placed between the cover of the acoustic element and the board.

- 25 An eighth aspect of the present invention is directed towards a portable communication device including the features of the first aspect, wherein the material is connected to the ground plane using electrically conducting springs.

- 30 A ninth aspect of the present invention is directed towards a portable communication device including the features of the first aspect, wherein the material is connected to the ground plane using an electrically conducting gasket.

- A tenth aspect of the present invention is directed towards a portable communication  
35 device including the features of the first aspect, wherein the antenna element is a PIFA antenna element.

An eleventh aspect of the present invention is directed towards a portable communication device including the features of the first aspect, wherein it is a cellular phone.



The invention has the following advantages. It is cheap to produce. It allows dual use of the space on the board harbouring the antenna, such that an acoustic element is combined with the antenna, which saves space within the portable communication device for other units. The problem with degraded antenna efficiency is greater the bigger the holes are that are needed. This degraded antenna efficiency because of the holes is limited by the grounding made of conducting material related to the exterior of the acoustic element. It also allows the use of big speakers that have good sound properties while limiting the degradation of the antenna efficiency to a minimum.

10

It should be emphasized that the term "comprises/comprising" when used in this specification is taken to specify the presence of stated features, integers, steps or components, but does not preclude the presence or addition of one or more other features, integers, steps, components or groups thereof.

15

#### BRIEF DESCRIPTION OF THE DRAWINGS

The present invention will now be described in more detail in relation to the enclosed drawings, in which:

20

fig. 1 schematically shows a front view of a stick type phone according to the invention, fig. 2 shows a side view of a speaker and antenna element placed on a circuit board of the phone in fig. 1,

fig. 3 shows a front view of the ground plane in the circuit board provided with holes for

25 two speakers,

fig. 4 schematically shows a side view of a speaker being connected directly to the ground plane of the board via its metal cover, and

fig. 5 schematically shows a side view of a speaker being connected to the ground plane of the board via an additional metal mesh.

30

#### DETAILED DESCRIPTION OF EMBODIMENTS

A portable communication device according to the present invention will now be described in relation to a cellular phone, which is a preferred variation of the invention. The phone is furthermore preferably a so-called stick type phone, but it can be other types of phones like clamshell phones. The portable communication device can also be another type of device, like a cordless phone, a communication module, a PDA or any other type of portable device communicating with radio waves.

Fig. 1 schematically shows a front view of a stick type phone according to the invention. The phone 10 includes a display and a keypad for viewing and entering information into the phone. It should be noted that the view does not show an antenna since this is inbuilt in the phone.

5

Fig. 2 schematically shows a side view of a board 12 on which a number of elements relevant to the invention are shown. It should be realised that a lot more different elements in the form of components and units are in reality connected to this board, for instance a radio circuit for driving the antenna. The number of units has however been limited to a minimum in order to better explain the invention. The board 12 may either be a printed wire board or a printed circuit board. The board 12 has two sides, where an acoustic element in the form of a speaker 16 is provided on a first upper side facing a throughhole in the board, shown as a dashed area in the figure, and an antenna element 14 is provided on a second lower side opposite the first side and the speaker. The antenna element 14 is preferably a so called PIFA antenna (Planar Inverted-F Antenna), which has an L-shape, where one leg of the L is connected to the board at right angles and the other leg of the L is provided at a distance from the board essentially parallel with the board surface. The antenna element 14 is connected via electrical leads to both the ground plane and to the radio circuit provided on the board 12 for enabling transmission at suitable radio frequencies. The antenna element furthermore provides an antenna volume inside the "L", in which an acoustic box 18 is provided, into which the speaker 16 emits sound. The board 12 also includes a ground plane (not shown), which runs in a layer within the board and stretches essentially along the whole length and width of the board. The hole provided for the speaker however also goes through this ground plane. There is furthermore a second speaker and corresponding hole provided parallel to the first speaker, which is not shown in this view, this in order to provide stereo sound.

Fig. 3 shows a front view of the ground plane 20 as a dashed area with the throughholes 22 provided for the previously described speakers. The holes are dimensioned according to the speakers and are here shown as being oval in shape. It should however be realised that they can have any shape that is suitable for connecting the speaker to the acoustic box of fig. 2, for instance having a circular shape. The shape can furthermore be dependent on the desired acoustical properties. The holes with the speaker and acoustic box together provide good acoustical properties for the speakers. However, because the sizes of the holes are so big in relation to the area of the ground plane associated with the antenna volume, they degrade the performance of the antenna significantly. The present invention is directed towards solving the problem associated with this degraded performance.

According to the invention this problem is solved through connecting electrically conducting material related to the exterior of the speaker to the ground plane. This material is preferably associated with the encapsulation of the speaker. The material is in one embodiment the casing of the speaker and in another embodiment a mesh provided  
5 between the hole and the speaker. In this way the performance is greatly enhanced.

Fig. 4 shows one way of doing this according to a first embodiment of the invention. In the drawing different parts of a simplified speaker are shown in a side view in relation to the part of the board having a corresponding hole. The speaker has a sound coil 24, which is  
10 encircled at its back and sides by a plastic casing 26. On the front side of the plastic casing 26 there is provided a metallic cover 28, which also stretches down the sides of the speaker. The metallic cover 28 is provided with sound apertures on its front side, which is indicated by the cover being shown with a dashed line in this front area. The apertures are provided in order to allow the speaker to emit sound into the acoustic box provided in the  
15 antenna volume (not shown). The cover 28 and the rest of the speaker are positioned above the hole 22 in the board 12, in which board there is also shown the ground plane 20. The hole 22 is indicated in the drawing as a dashed area. In order to enhance the performance of the antenna, this metallic cover 28 is connected to the ground plane 20 via two connections 30 and 32 one on each side of the hole 22, which greatly enhances the  
20 performance of the antenna. The other hole of the board has not been described here, but it has a speaker fastened to it in the same way as for the above-described hole.

In operation of the speaker, the speaker emits sound into the acoustic box, which sound is then submitted to a user of the phone via an ear port connected to the box. The ear port is  
25 not shown in any of the drawings. This type of speaker is described in more detail in European patent application number 04003111.4, which is herein incorporated by reference.

Because of the connection of the metallic cover of the speaker to the ground plane, the  
30 ground plane is thus enlarged and the effect of the holes beneath the antenna volume are minimised. In this way unnecessary radiation that would be wasted if going through the hole is furthermore more or less eliminated.

Fig. 5 shows another embodiment of the invention in the same view as fig. 4. This figure  
35 includes all the elements of fig. 4, but with one difference. Between the cover 28, which is plastic and not metallic, and the board 12 there is provided a metallic mesh 34, which is connected to the ground plane 20 with connections 30 and 32 in the same way as the cover in fig. 4. The mesh 34 is indicated with a dashed line in fig. 5. The reason for this solution is that the cover 28 is not of an electrically conductive material. In order to

provide the enlargement of the ground plane, the mesh 34 is therefore inserted, which provides the necessary enlargement of the ground plane.

It should be realised that the connection of the cover or the mesh to the ground plane  
5 could be provided in a multitude of ways. They can be provided using an electrically  
conducting gasket surrounding the cover and/or mesh. They can be provided using metal  
springs that are fastened in the hole of the board. Yet another alternative is that an  
electrically conducting speaker holder is soldered to the board in contact with the ground  
plane, into which holder the speaker including cover and/or mesh is attached using for  
10 instance springs. These are just a few of the ways in which the speaker can be attached to  
the ground plane.

The antenna element can be a multiband antenna element designed for enabling  
transmission and reception at several frequency bands.

15

The portable communication device according to the invention has several advantages. It  
is cheap to produce. It allows dual use of the antenna volume, such that an acoustic  
element is combined with the antenna, which saves space within the portable  
communication device for other components and units. The problem with degraded  
20 antenna efficiency is greater the more and bigger holes that are needed. This degraded  
antenna efficiency because of the holes is limited by the grounding made of conducting  
material related to the exterior of the speaker. It also allows the use of big speakers that  
have good sound properties while limiting the degradation of the antenna efficiency to a  
minimum.

25

The present invention can be varied in many ways in addition to those mentioned earlier.  
There can be more holes, but there might just be one. The grounding can furthermore be  
provided in only one position, two-as in fig. 4 and 5 or more. In the case of a gasket, the  
grounding can be made along the whole circumference of the hole. It is also possible to  
30 provide the speaker inside the antenna volume instead of outside. The mesh and casing  
that are grounded need not be metallic. It is sufficient that they are made of electrically  
conducting materials. Thus the present invention is only to be limited by the following  
claims.

CLAIMS

1. Portable communication device (10) comprising:  
a board (12) for receiving electrical circuits and comprising a ground plane (20)  
5 and having at least one throughhole (22),  
an antenna element (14) provided on one side of the board, and  
an acoustic element (16, 24, 26, 28) placed on the board aligned with the  
throughhole,  
wherein an electrically conducting material (28; 34) related to the exterior of  
10 said acoustic element is connected (30, 32) to the ground plane of said board  
for enhancing the efficiency of the antenna.
2. Portable communication device according to claim 1, wherein the antenna  
element is positioned with at least one part at a distance above the board, for  
15 defining an antenna volume between the board and the antenna element, and  
said at least one hole is provided under the antenna element.
3. Portable communication device according to claim 2, wherein the acoustic  
element is provided on another opposite side of the board.  
20
4. Portable communication device according to claim 3, wherein an acoustic box  
(18) associated with the acoustic element is provided in the antenna volume.
5. Portable communication device according to any previous claim, wherein the  
25 material is a cover (28) of the acoustic element made of an electrically  
conducting material.
6. Portable communication device according to claim 5, wherein the cover is  
provided with sound apertures.  
30
7. Portable communication device according to any of claims 1 - 4, wherein the  
material is a mesh (34) made of an electrically conducting material placed  
between the cover (28) of the acoustic element and the board (12).
8. Portable communication device according to any previous claim, wherein the  
35 material is connected to the ground plane using electrically conducting springs.

9

9. Portable communication device according to any of claims 1 - 7, wherein the material is connected to the ground plane using an electrically conducting gasket.

5

10. Portable communication device according to any previous claim, wherein the antenna element is a PIFA antenna element.

11. Portable communication device according to any previous claim, wherein it is a cellular phone.

10

**ABSTRACT**

The present invention relates to a portable communication device comprising a board (12) for receiving electrical circuits and that includes a ground plane (20) and has at least one  
5 throughhole (22), an antenna element provided on one side of the board, and an acoustic element (24, 26, 28) placed on the board aligned with the throughhole. An electrically conducting material (28) related to the exterior of the acoustic element is connected (30, 32) to the ground plane of the board for enhancing the efficiency of the antenna.

10 Fig. 3

1/1

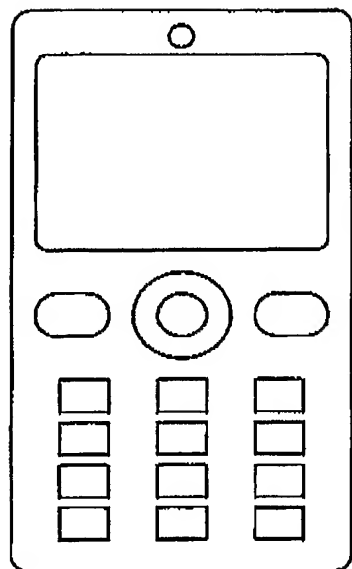


FIG. 1

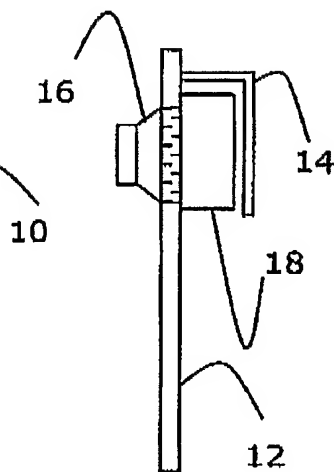


FIG. 2

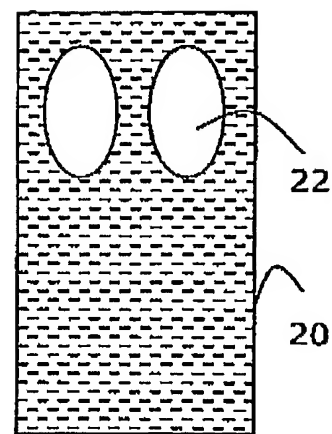


FIG. 3

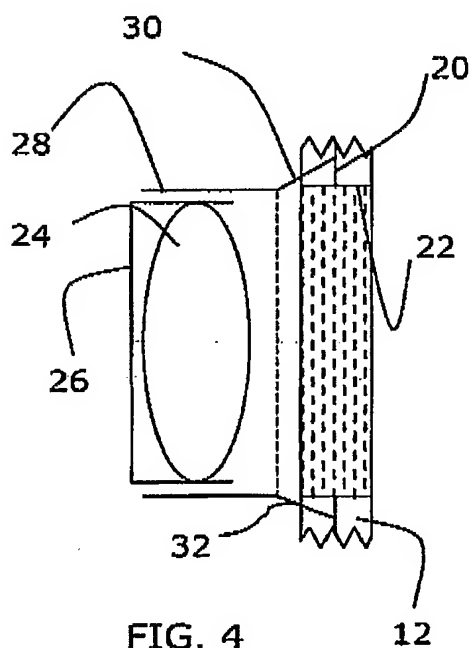


FIG. 4

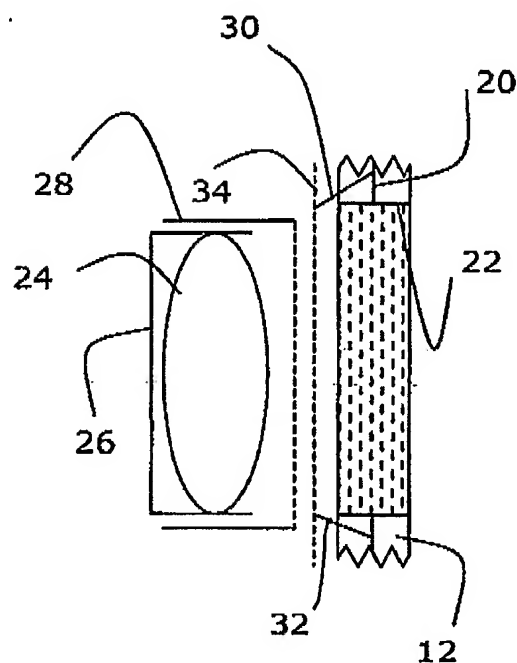


FIG. 5



